




东莞市地安电子科技有限公司
DONGGUAN CITY DIERAN ELECTRONICS CO.,LTD

REVISION RECORD				
REV.	DESCRIPTION	ECN NO.	APPROVED	DATE

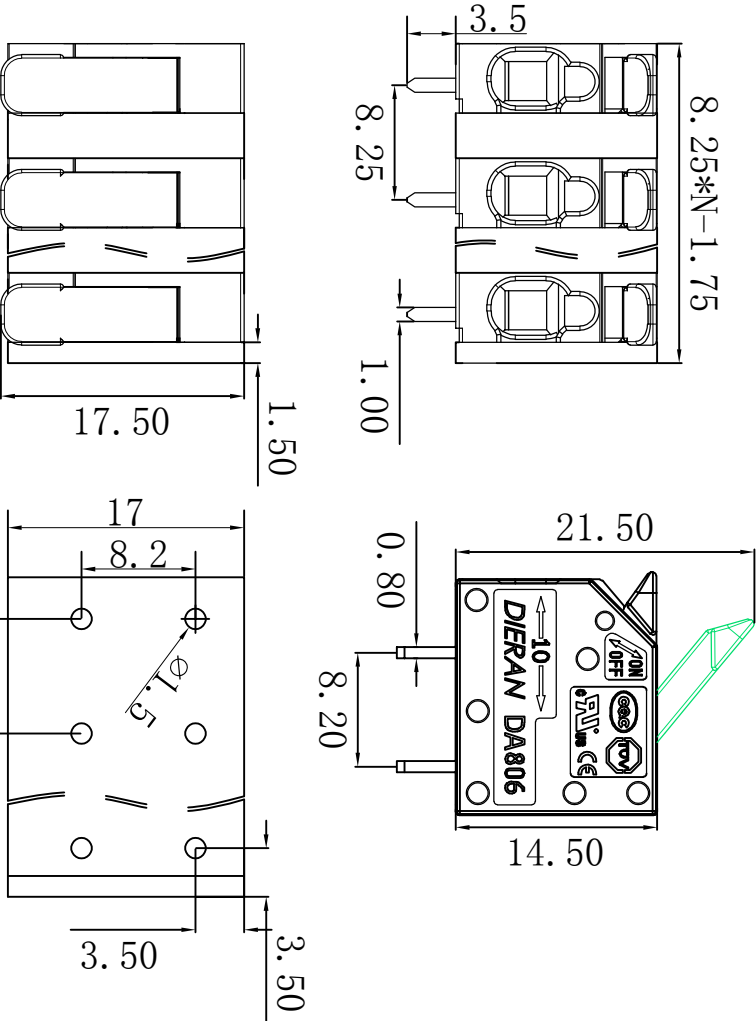

项目/参数/认证	CCC	UL	CE	RoHS
额定电压 (Rated Voltage) [V]	450	450	450	300
额定电流 (Rated Current) [A]	32	32	32	20
额定线经平方 (Wire Range mm²)	0.34-4	0.34-4	0.34-4	0.34-4
额定线经线号 (Wire Range AWG)	24-12	24-12	24-12	24-12
冲击电压 Impulse withstand voltage	4 (KV)			
剥线长度 (Stripping Length) [mm]	10-11 (mm)			
绝缘材料 (Insulation Material)	PA66 UL94V-0			
导体材料 (Conductor Material)	红铜 (Red brass)			
导体表面镀层 (Contactive Coating)	镀锡 (Dumb tin)			
间距 (Pitch) [mm]	8.25			
级数 (Poles) [P]	2-32P			
工作温度 (Operating temperatur) [°C]	-40°C ~ +105°C			
焊锡温度 (Soldering temperature) [°C]	250°C/5S			

linear dimension (Tolerances Standard GB/T 1486-2008)										—	∇	⊥
variable	6 to	over 6 to	over 10 to	over 30 to	over 60 to	over 100 to	over 100 to	over 160 to	over 160 to	over 10 to	over 10 to	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	±1.30	±1.60	0.10	0.30	0.60

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	1:1	第三视角/THIRD ANGLE PROJECTION	名称/TITLE	版本/REV	V0
东莞市地安电子科技有限公司							DA806R-825		