



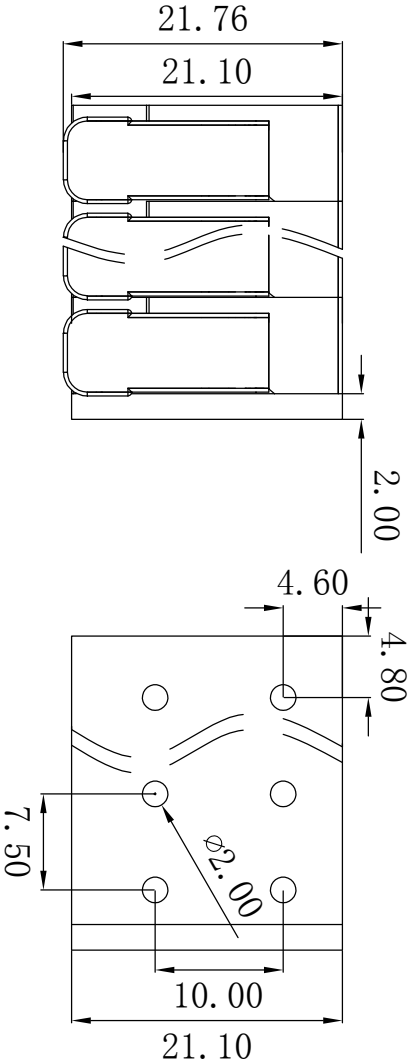

东莞市地安电子科技有限公司
DONGGUAN CITY DIERAN ELECTRONICS CO.,LTD

REVISION RECORD				
REV.	DESCRIPTION	ECN NO.	APPROVED	DATE

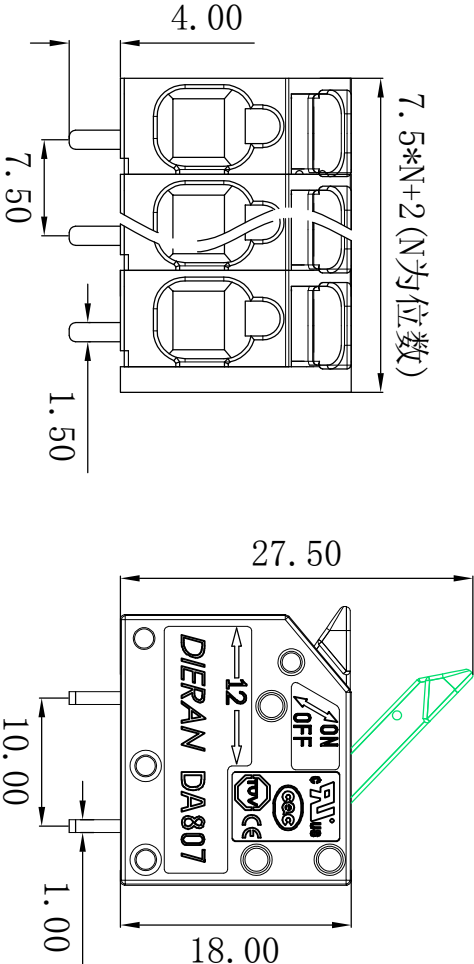

项目/参数/认证				
额定电压 (Rated Voltage) [V]	600	600	600	300
额定电流 (Rated Current) [A]	41	41	41	30
额定线经平方 (Wire Range mm²)	0.34-6	0.34-6	0.34-6	0.34-6
额定线经线号 (Wire Range AWG)	24-10	24-10	24-10	24-10
冲击电压 Impulse withstand voltage	4 (KV)			
剥线长度 (Stripping Length) [mm]	10-11 (mm)			
绝缘材料 (Insulation Material)	PA66 UL94V-0			
导体材料 (Contact Material)	红铜 (Red brass)			
导体表面镀层 (Contactive Coating)	镀锡 (Dumb tin)			
间距 (Pitch) [mm]	7.5			
级数 (Poles) [P]	2-32P			
工作温度 (Operating temperatur) [°C]	-40°C ~ +105°C			
焊锡温度 (Soldering temperature) [°C]	250°C/5S			

linear dimension (Tolerances Standard GB/T 14486-2008)										—		⊥
variable	over	over	over	over	over	over	over	over	over		over	over
range	6	10	30	60	100	160	10	30	60	10	100	100
to	to	to	to	to	to	to	to	to	to	to	to	to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60		

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	1:1	第三视角/THIRD ANGLE PROJECTION			名称/ TITLE	版本/ REV	V0
东莞市地安电子科技有限公司									DA807-750		