
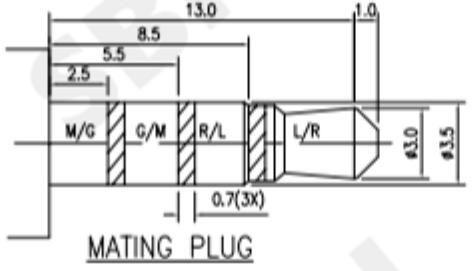

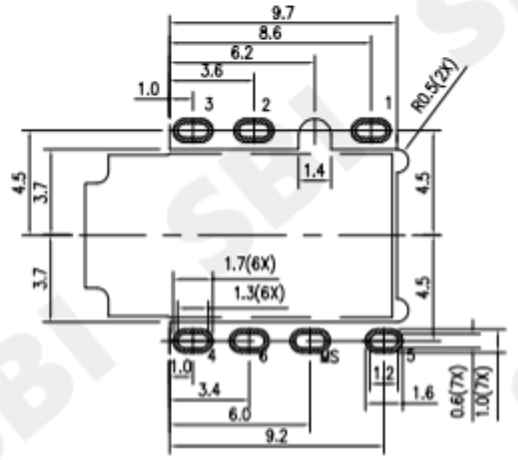
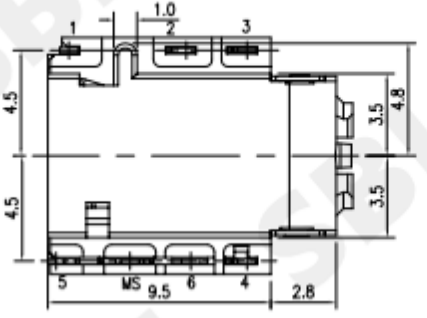
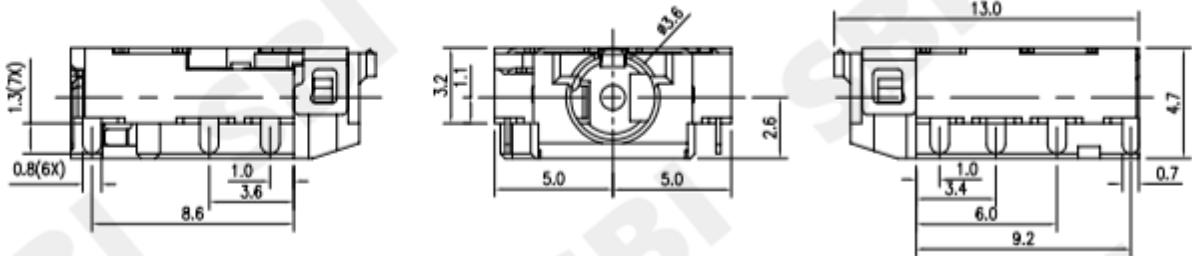
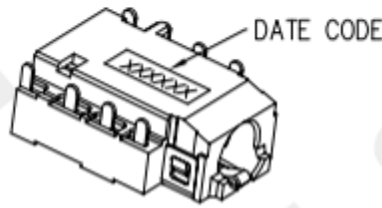


RoHS  
Compliant

SYMBOL	REVISION	APPROVAL	DATE

**SPECIFICATIONS**

- ELECTRICAL CHARACTERISTICS:
  - 1-1.RATING: DC 12V 1A
  - 1-2.CONTACT RESISTANCE: 30mΩ MAX(INITIAL)
  - 1-3.DIELECTRIC WITHSTANDING VOL TAGE: 500V AC FOR ONE MINUTE
  - 1-4.INSULATION RESISTANCE: 100MΩ MIN,MEASURED BY 500V DC
- MECHANICAL CHARACTERISTICS:
  - 2-1.INSERTION FORCE: 0.5KG-2.2KG
  - 2-2.WITHDRAWAL FORCE: 0.5KG-2.0KG
- LIFE TEST:5,000 CYCLES MIN
- PACKING:TAPE & REEL
- FOR HAND SOLDERING LEAD FREE PROCESS
- PRINTED DATE CODE "YY MM DD" ON TOP OF CONNECTOR

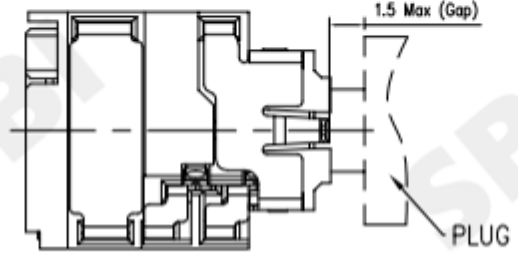

P.C.B LAYOUT  
TOP VIEW

NO.	PARTS	MATERIAL	QTY.	FINISHING
4	TERMINAL 1,2,3,4,5,6	C5210	6	Au PLATED
3	TERMINAL MS	C5210	1	Ni PLATED
2	INSULATOR	PPA UL 94VO	1	BLACK
1	HOUSING	PPA UL 94VO	1	BLACK

**SMART BILLION INDUSTRIAL LIMITED**

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		PHONE JACK(STEREO)		DRAWING	Z.L.Liang	DWG.No.
PART NO.		ST-3569		CHECK	G.C.Chan	REV. A0
UNIT : mm	TOLERANCE UNLESS OTHERWISE SPECIFIED	UP TO 5	±0.2	ANGLE	APPROVAL	DATE
		ABOVE 5 ~30	±0.3			
		ABOVE 30	±0.5	SCALE	1:1	PAGE
		ANGLE	±3°			1 OF 1