






RoHS
Compliant

PART No.	KNOB LENGTH(L)
TS-1143M	4.30mm
TS-1150M	5.00mm
TS-1160M	6.00mm
TS-1170M	7.00mm
TS-1180M	8.00mm
TS-1185M	8.50mm
TS-1195M	9.50mm
TS-11-110M	11.00mm
TS-11-130M	13.00mm

SYMBOL	REVISION	APPROVAL	DATE

SPECIFICATIONS

- ELECTRICAL CHARACTERISTICS:
 - 1-RATING: DC 12V 50mA
 - 1-2.CONTACT RESISTANCE: 100mΩ MAX(INITAL)
 - 1-3.DIELECTRIC WITHSTANDING VOLTAGE: 250V AC FOR ONE MINUTE
 - 1-4.INSULATION RESISTANCE: 100MΩ MIN,MEASURED BY 500V DC
 - 1-5.BOUNCE:10sec. MAX
- MECHANICAL PERFORMANCE
 - 2.1.OPERATING FORCE : 160±30gf; 250±50gf
- LIFE TEST
 - 3.1.3-1.ELECTRONICS LIFE TEST 100,000 CYCLES.

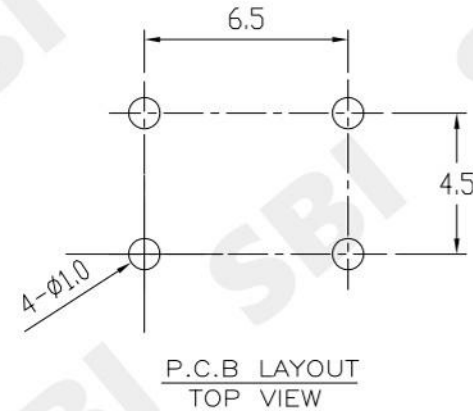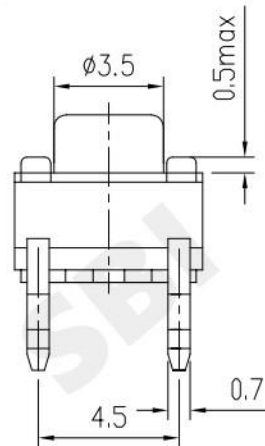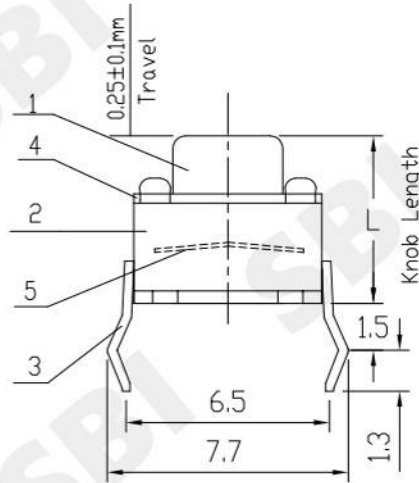

NO.	DESCRIPTION	MATERIAL	QTY.	FINISHING
5	DOME	C5210	1	Ag CLAD
4	COVER	SPCC	1	Ni PLATED
3	TERMINAL	C2680	4	Ag PLATED
2	CASE	PA66	1	BLACK
1	KNOB	PA66	1	BLACK

SMART BILLION INDUSTRIAL LIMITED

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		TACT SWITCH		DRAWING	Z.L.Liang	DWG.No.	SBT21
PART NO.		TS-1150M-160		CHECK	G.C.Chen	REV.	A0
UNIT: mm	TOLERANCE UNLESS OTHERWISE SPECIFIED	UP TO 5	±0.2	APPROVAL	G.C.Chen	DATE	2019-09-01
		ABOVE 5~30	±0.3				
		ABOVE 30	±0.5	SCALE	1:1	PAGE	1 OF 1
		ANGLE	±3°				