


RoHS
Compliant




PART No.	H
TS-1125S	2.50mm
TS-1131S	3.10mm
TS-1134S	3.40mm
TS-1154S	5.40mm

SYMBOL	REVISION	APPROVAL	DATE

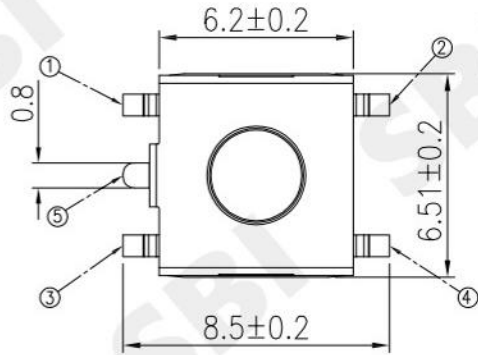


SPECIFICATIONS

- ELECTRICAL CHARACTERISTICS:
 - 1-1.RATING: DC 12V 50mA
 - 1-2.CONTACT RESISTANCE: 100mΩ MAX(INITAL)
 - 1-3.DIELECTRIC WITHSTANDING VOLTAGE: 250V AC FOR ONE MINUTE
 - 1-4.INSULATION RESISTANCE: 100MΩ MIN,MEASURED BY 500V DC
- MECHANICAL PERFORMANCE
 - 2.1.OPERATING FORCE :160±30gf; 250±50.
- LIFE TEST
 - 3.1.3-1.ELECTRONICS LIFE TEST 100,000 CYCLES.

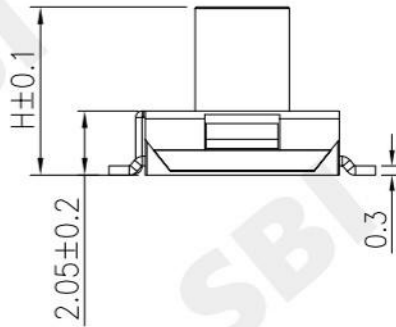

CIRCUIT

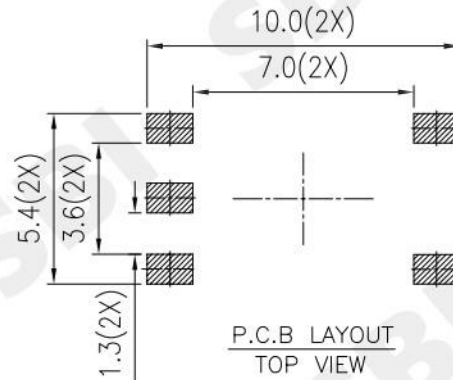

P.C.B LAYOUT
TOP VIEW

5	TERMINAL	C2680	4	Ag PLATED
4	CASE	PPA	1	BLACK
3	CONTACT	SUS301	1	Ag CLAD
2	COVER	C5191	1	Sn PLATED
1	KNOB	Silica Gel	1	BLACK
NO.	PARTS	MATERIAL	QTY.	FINISHING

SMART BILLION INDUSTRIAL LIMITED

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		TACT SWITCH		DRAWING	Z.L.Liang	DWG.No.	
PART NO.		TS-1154S-160-TR		CHECK	G.C.Chen	REV.	A
	UNIT:	TOLERANCE UNLESS OTHERWISE SPECIFIED UP TO 5 ±0.2 ABOVE 5~30 ±0.3 ABOVE 30 ±0.5 ANGLE ±3°	ANGLE	APPROVAL		DATE	2021-04-05
	mm		0°±3'	SCALE	1:1	PAGE	