RoHS Compliant

SYMBOL	REVISION	APPROVAL	DATE

SPECIFICATIONS

1. ELECTRICAL CHARACTERISTICS:
   1-1.RATING: DC 12V 50mA
   1-2.CONTACT RESISTANCE: 100mΩ MAX(INITAL)
   1-3.DIELECTRIC WITHSTANDING VOL TAGE: 250V AC FOR ONE MINUTE
   1-4.INSULATION RESISTANCE: 100MΩ MIN,MEASURED BY 500V DC
2. MECHANICAL CHARACTERISTICS:
   2-1.OPERATING FORCE :160±30gf;250±50gf
3. LIFE TEST:ELECTRONICS LIFE TEST 100,000 CYCLES.

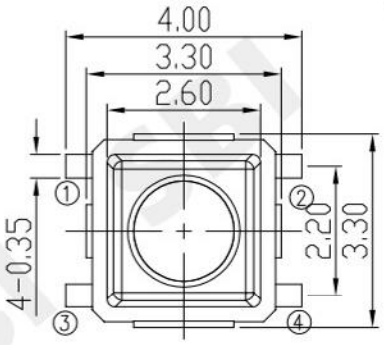

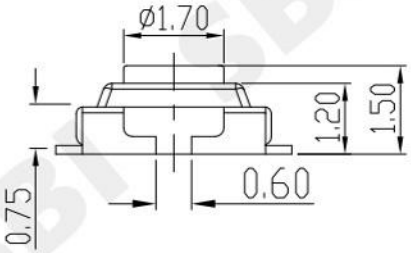



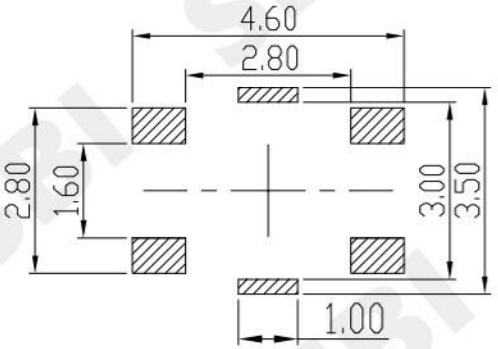

P.C.B LAYOUT
TOP VIEW



CIRCUIT

No.	DESCRIPTION	MATERIAL	QTY.	PLATING
6	COVER	SUS	1	NATURAL
5	FILM	POLYMIDE FILM	1	YELLOW
4	DOME	SUS301	1	Ag CLAD
3	TERMINAL	C5210	4	Ag PLATED
2	CASE	LCP	1	BLACK
1	KNOB	LCP	1	BLACK

SMART BILLION INDUSTRIAL LIMITED

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	TACT SWITCH			DRAWING	Z.L.Liang	DWG.No.	
PART NO.	TS-3401S-260-TR			CHECK	G.C.Chen	REV.	A0
UNIT : mm	TOLERANCE UNLESS OTHERWISE SPECIFIED	UP TO 5 ±0.2 ABOVE 5 ~30 ±0.3 ABOVE 30 ±0.5 ANGLE ±3°	ANGLE 0°±3°	APPROVAL	G.C.Chen	DATE	2020/07/08
				SCALE	1:1	PAGE	1 OF 1