

RoHS Compliant





SYMBOL	REVISION	APPROVAL	DATE

**SPECIFICATIONS**

- ELECTRICAL CHARACTERISTICS:
  - 1-1.RATING: DC 12V 2A
  - 1-2.CONTACT RESISTANCE: 30mΩ MAX(INITIAL)
  - 1-3.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
  - 1-4.INSULATION RESISTANCE: 100MΩ MIN,MEASURED BY 500V DC
- LIFE TEST: 10,000 CYCLES.
- PACKING: BAG(1000PCS/BAG)



SCHMATIC

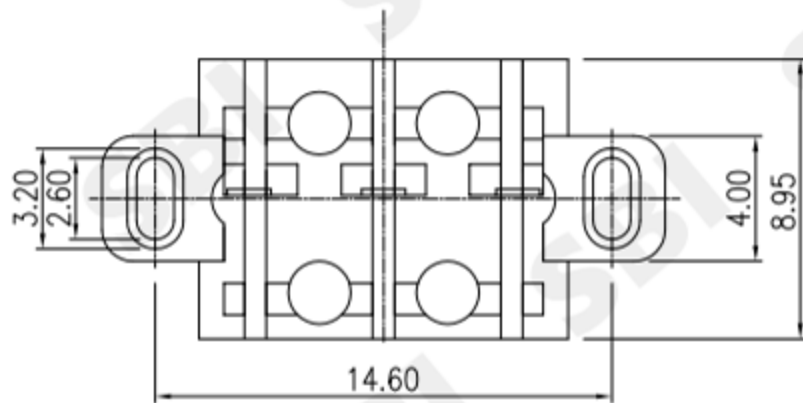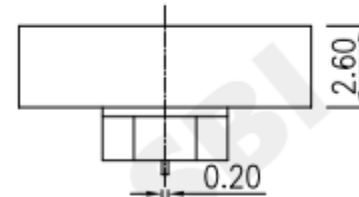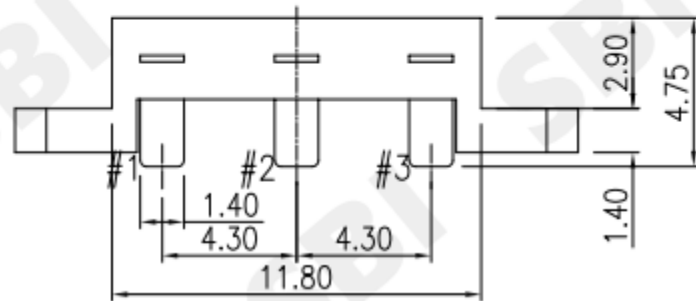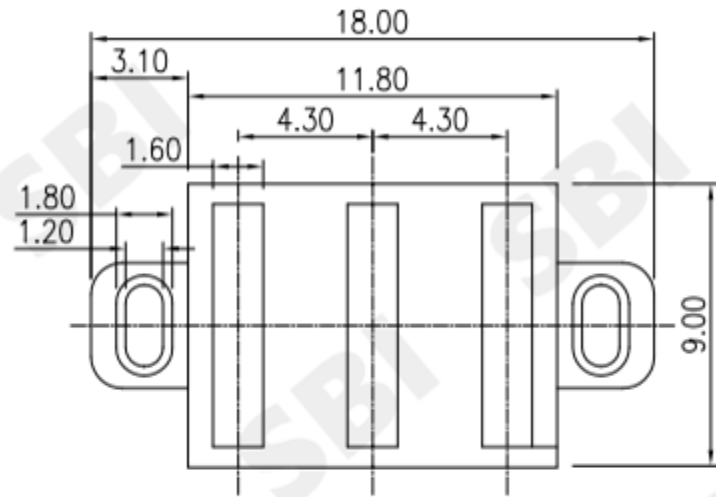

No.	DESCRIPTION	MATERIAL	PLATING
1	CONTACT TERMINAL	C5191	Au PLATED
2	HOUSING	ABS	BLACK

**SMART BILLION INDUSTRIAL LIMITED**

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		CONNECTOR		DRAWING		Z.L.Liang		DWG.No.	
PART NO.		CL-027-3P		CHECK		G.C.Chen		REV. A0	
UNIT : mm	TOLERANCE UNLESS OTHERWISE SPECIFIED X.X ± 0.3 X.XX ± 0.2 X.XXX ± 0.1	ANGLE 0°±3'	APPROVAL		G.C.Chen		DATE		2017-Mar-07
			SCALE		1:1		PAGE		1 OF 1